



# SWSS120-44

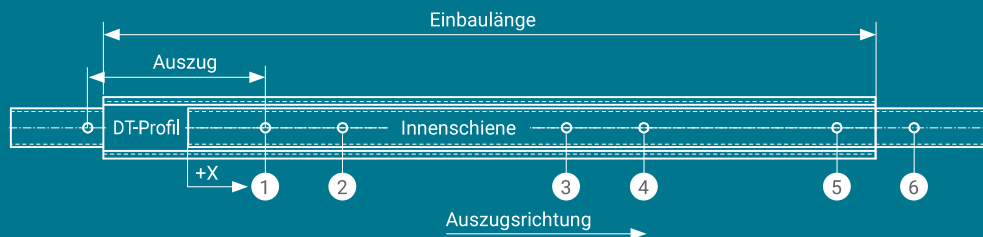

## BOHRPOSITIONEN

in X, Innenschiene

Bohrung	Bohrposition	Einbaulänge
1	100 mm	immer
2	300 mm	immer
3		Ab Einbaulänge > 1000 mm
4		Ab Einbaulänge > 1000 mm
5	Einbaulänge - 300 mm	immer
6	Einbaulänge - 100 mm	immer

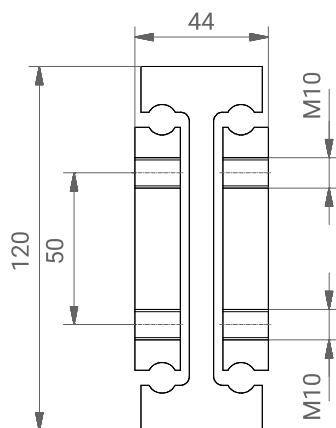

## ABMESSUNGEN

Max. Last/Pair N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
9750	16,7	500	500	SWSS120-44-500
10000	18,4	550	550	SWSS120-44-550
10500	20,1	600	600	SWSS120-44-600
11000	21,7	650	650	SWSS120-44-650
11500	23,3	700	700	SWSS120-44-700
11800	25,0	750	750	SWSS120-44-750
11800	26,7	800	800	SWSS120-44-800
11550	28,4	850	850	SWSS120-44-850
11300	30,1	900	900	SWSS120-44-900
11050	31,7	950	950	SWSS120-44-950
10800	33,4	1000	1000	SWSS120-44-1000
10550	35,1	1050	1050	SWSS120-44-1050
10300	36,7	1100	1100	SWSS120-44-1100
10050	38,4	1150	1150	SWSS120-44-1150
9800	40,1	1200	1200	SWSS120-44-1200
9200	43,4	1300	1300	SWSS120-44-1300
8600	46,8	1400	1400	SWSS120-44-1400
8000	50,2	1500	1500	SWSS120-44-1500
7400	53,5	1600	1600	SWSS120-44-1600
6800	56,8	1700	1700	SWSS120-44-1700
6100	60,2	1800	1800	SWSS120-44-1800
5400	63,5	1900	1900	SWSS120-44-1900
4700	66,9	2000	2000	SWSS120-44-2000
3900	70,3	2100	2100	SWSS120-44-2100
3350	73,7	2200	2200	SWSS120-44-2200
2950	77,1	2300	2300	SWSS120-44-2300
2750	80,5	2400	2400	SWSS120-44-2400
2575	83,7	2500	2500	SWSS120-44-2500
2450	86,8	2600	2600	SWSS120-44-2600
2300	90,2	2700	2700	SWSS120-44-2700
2175	93,6	2800	2800	SWSS120-44-2800
2000	97,0	2900	2900	SWSS120-44-2900
1800	100,4	3000	3000	SWSS120-44-3000

## WERKSTOFF

ST NX2 NX4

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

VG VO VOG LL KK NC4 FDOG VR  
VRM LS GS SS

## FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder E-Mail [service@sws-technik.de](mailto:service@sws-technik.de)