



SWSS150-56

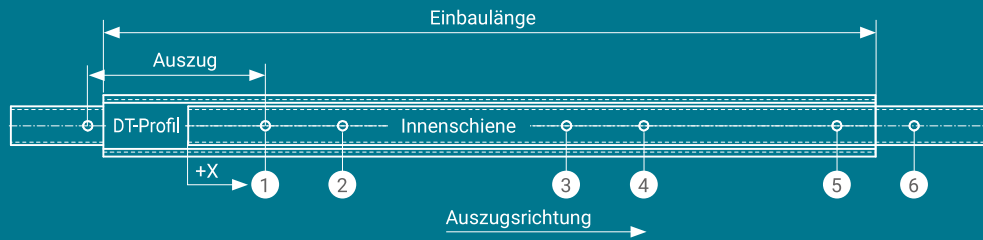

BOHRPOSITIONEN

in X, Innenschiene

Bohrung	Bohrposition	Einbaulänge
1	100 mm	immer
2	300 mm	immer
3		Ab Einbaulänge > 1000 mm
4		Ab Einbaulänge > 1000 mm
5	Einbaulänge - 300 mm	immer
6	Einbaulänge - 100 mm	immer

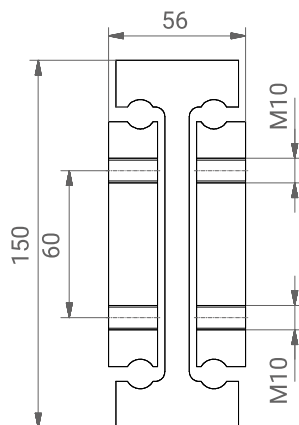

ABMESSUNGEN

Max. Last/Paar N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
12000	27,5	500	500	SWSS150-56-500
12500	30,2	550	550	SWSS150-56-550
13000	33,0	600	600	SWSS150-56-600
13500	35,7	650	650	SWSS150-56-650
13900	38,6	700	700	SWSS150-56-700
13700	41,3	750	750	SWSS150-56-750
13500	44,0	800	800	SWSS150-56-800
13300	46,7	850	850	SWSS150-56-850
13100	49,5	900	900	SWSS150-56-900
12800	52,3	950	950	SWSS150-56-950
12500	55,0	1000	1000	SWSS150-56-1000
12300	57,7	1050	1050	SWSS150-56-1050
12100	60,4	1100	1100	SWSS150-56-1100
11900	63,2	1150	1150	SWSS150-56-1150
11700	66,0	1200	1200	SWSS150-56-1200
11300	71,4	1300	1300	SWSS150-56-1300
10900	76,9	1400	1400	SWSS150-56-1400
10400	82,4	1500	1500	SWSS150-56-1500
9900	87,9	1600	1600	SWSS150-56-1600
9250	93,5	1700	1700	SWSS150-56-1700
8600	99,0	1800	1800	SWSS150-56-1800
7800	104,0	1900	1900	SWSS150-56-1900
7000	109,9	2000	2000	SWSS150-56-2000
6200	115,8	2100	2100	SWSS150-56-2100
5400	121,7	2200	2200	SWSS150-56-2200
4600	127,6	2300	2300	SWSS150-56-2300
4000	133,5	2400	2400	SWSS150-56-2400
3750	138,2	2500	2500	SWSS150-56-2500
3500	142,8	2600	2600	SWSS150-56-2600
3250	148,3	2700	2700	SWSS150-56-2700
3000	153,8	2800	2800	SWSS150-56-2800
2750	159,3	2900	2900	SWSS150-56-2900
2500	164,8	3000	3000	SWSS150-56-3000

WERKSTOFF

ST NX2 NX4 A

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

VG VO VOG LL KK NC4 FDOG VR
VRM LS GS SS

FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder E-Mail service@sws-technik.de