



SWSS60-32

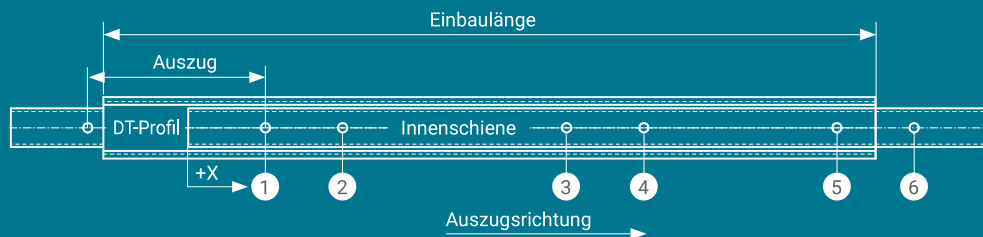

BOHRPOSITIONEN

in X, Innenschielen

Bohrung	Bohrposition	Einbaulänge
1	50 mm	immer
2	100 mm	immer
3		Ab Einbaulänge > 500 mm
4		Ab Einbaulänge > 500 mm
5	Einbaulänge - 100 mm	immer
6	Einbaulänge - 50 mm	immer

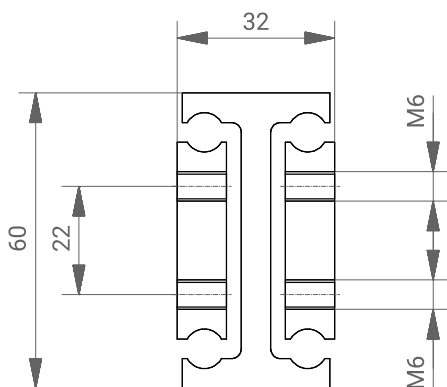

ABMESSUNGEN

Max. Last/Pair N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
3850	2,9	250	250	SWSS60-32-250
4500	3,5	300	300	SWSS60-32-300
5000	4,1	350	350	SWSS60-32-350
5250	4,6	400	400	SWSS60-32-400
5350	5,2	450	450	SWSS60-32-450
5400	5,8	500	500	SWSS60-32-500
5500	6,4	550	550	SWSS60-32-550
5400	7,0	600	600	SWSS60-32-600
5350	7,6	650	650	SWSS60-32-650
5350	8,2	700	700	SWSS60-32-700
5100	8,7	750	750	SWSS60-32-750
4900	9,3	800	800	SWSS60-32-800
4700	9,9	850	850	SWSS60-32-850
4500	10,5	900	900	SWSS60-32-900
4300	11,1	950	950	SWSS60-32-950
4050	11,7	1000	1000	SWSS60-32-1000
3850	12,3	1050	1050	SWSS60-32-1050
3700	12,9	1100	1100	SWSS60-32-1100
3500	13,5	1150	1150	SWSS60-32-1150
3300	14,0	1200	1200	SWSS60-32-1200
2900	15,2	1300	1300	SWSS60-32-1300
2500	16,4	1400	1400	SWSS60-32-1400
2100	17,5	1500	1500	SWSS60-32-1500
1900	18,6	1600	1600	SWSS60-32-1600
1750	19,8	1700	1700	SWSS60-32-1700
1550	21,0	1800	1800	SWSS60-32-1800
1350	22,2	1900	1900	SWSS60-32-1900
1200	23,4	2000	2000	SWSS60-32-2000
1050	24,6	2100	2100	SWSS60-32-2100
900	25,8	2200	2200	SWSS60-32-2200
800	27,0	2300	2300	SWSS60-32-2300

WERKSTOFF

ST NX2 NX4 A

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

VG VO VOG EHG EHO LL EOG KK
 NC4 FDOG VR VRM LS GS SS

FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder E-Mail service@sws-technik.de