



# SWSS70-36

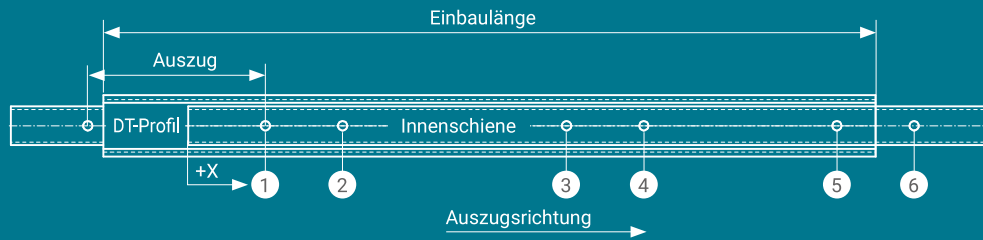

## BOHRPOSITIONEN

in X, Innenschiene

Bohrung	Bohrposition	Einbaulänge
1	50 mm	immer
2	100 mm	immer
3		Ab Einbaulänge > 500 mm
4		Ab Einbaulänge > 500 mm
5	Einbaulänge - 100 mm	immer
6	Einbaulänge - 50 mm	immer

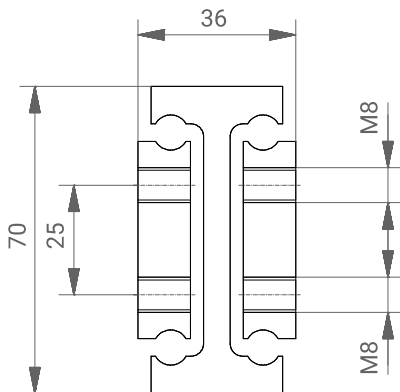

## ABMESSUNGEN

Max. Last/Par N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
5000	4,3	300	300	SWSS70-36-300
5500	4,9	350	350	SWSS70-36-350
6500	5,8	400	400	SWSS70-36-400
7000	6,6	450	450	SWSS70-36-450
7200	7,3	500	500	SWSS70-36-500
7400	7,9	550	550	SWSS70-36-550
7400	8,5	600	600	SWSS70-36-600
7300	9,1	650	650	SWSS70-36-650
7150	9,7	700	700	SWSS70-36-700
6950	10,2	750	750	SWSS70-36-750
6750	10,8	800	800	SWSS70-36-800
6550	11,4	850	850	SWSS70-36-850
6300	12,0	900	900	SWSS70-36-900
6100	12,6	950	950	SWSS70-36-950
5800	13,2	1000	1000	SWSS70-36-1000
5600	13,9	1050	1050	SWSS70-36-1050
5450	14,5	1100	1100	SWSS70-36-1100
5200	15,2	1150	1150	SWSS70-36-1150
5000	16,7	1200	1200	SWSS70-36-1200
4550	17,5	1300	1300	SWSS70-36-1300
4100	19,0	1400	1400	SWSS70-36-1400
3650	20,5	1500	1500	SWSS70-36-1500
3225	21,6	1600	1600	SWSS70-36-1600
2975	22,8	1700	1700	SWSS70-36-1700
2650	24,0	1800	1800	SWSS70-36-1800
2300	25,2	1900	1900	SWSS70-36-1900
2050	26,4	2000	2000	SWSS70-36-2000
1775	27,8	2100	2100	SWSS70-36-2100
1550	29,0	2200	2200	SWSS70-36-2200
1350	30,4	2300	2300	SWSS70-36-2300
1150	33,4	2400	2400	SWSS70-36-2400
950	36,4	2500	2500	SWSS70-36-2500

## WERKSTOFF

ST NX2 NX4 A

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

VG VO VOG EHG EHO LL EOG KK  
NC4 FDOG VR VRM LS GS SS

## FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder E-Mail [service@sws-technik.de](mailto:service@sws-technik.de)