



SWSS80-36

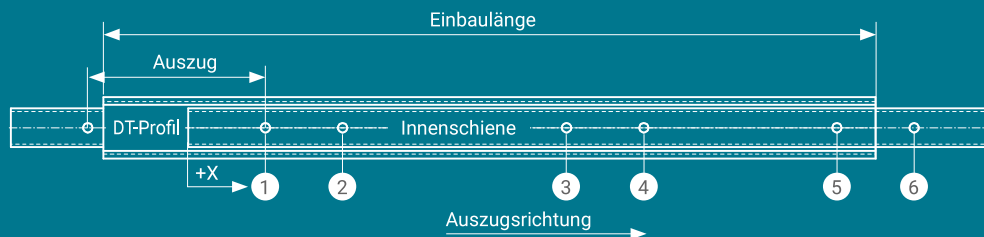

BOHRPOSITIONEN

in X, Innenschielen

Bohrung	Bohrposition	Einbaulänge
1	100 mm	immer
2	200 mm	immer
3		Ab Einbaulänge > 1000 mm
4		Ab Einbaulänge > 1000 mm
5	Einbaulänge - 200 mm	immer
6	Einbaulänge - 100 mm	immer

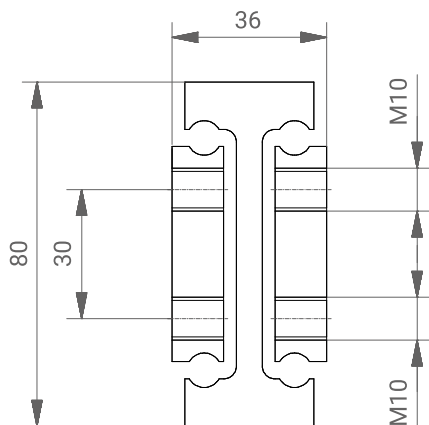

ABMESSUNGEN

Max. Last/Pair N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
6000	5,3	300	300	SWSS80-36-300
6750	6,2	350	350	SWSS80-36-350
7500	7,0	400	400	SWSS80-36-400
8250	7,9	450	450	SWSS80-36-450
9000	8,8	500	500	SWSS80-36-500
9250	9,6	550	550	SWSS80-36-550
9350	10,5	600	600	SWSS80-36-600
9200	11,4	650	650	SWSS80-36-650
9050	12,3	700	700	SWSS80-36-700
8800	13,1	750	750	SWSS80-36-750
8600	14,0	800	800	SWSS80-36-800
8350	14,9	850	850	SWSS80-36-850
8100	15,8	900	900	SWSS80-36-900
7850	16,6	950	950	SWSS80-36-950
7650	17,5	1000	1000	SWSS80-36-1000
7400	18,4	1050	1050	SWSS80-36-1050
7150	19,3	1100	1100	SWSS80-36-1100
6925	20,1	1150	1150	SWSS80-36-1150
6700	21,0	1200	1200	SWSS80-36-1200
6200	22,8	1300	1300	SWSS80-36-1300
5700	24,5	1400	1400	SWSS80-36-1400
5200	26,3	1500	1500	SWSS80-36-1500
4600	28,0	1600	1600	SWSS80-36-1600
4300	29,8	1700	1700	SWSS80-36-1700
4100	31,5	1800	1800	SWSS80-36-1800
3700	33,3	1900	1900	SWSS80-36-1900
3300	35,0	2000	2000	SWSS80-36-2000
3000	36,8	2100	2100	SWSS80-36-2100
2600	38,6	2200	2200	SWSS80-36-2200
2200	40,2	2300	2300	SWSS80-36-2300
1800	42,0	2400	2400	SWSS80-36-2400
1600	43,8	2500	2500	SWSS80-36-2500
1400	45,6	2600	2600	SWSS80-36-2600
1200	47,3	2700	2700	SWSS80-36-2700
1000	49,0	2800	2800	SWSS80-36-2800
900	50,8	2900	2900	SWSS80-36-2900
800	52,6	3000	3000	SWSS80-36-3000

WERKSTOFF

ST NX2 NX4 A

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

VG VO VOG EHG EHO LL EOG KK
NC4 FDOG VR VRM LS GS SS

FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder
E-Mail service@sws-technik.de