


SWSU100-51

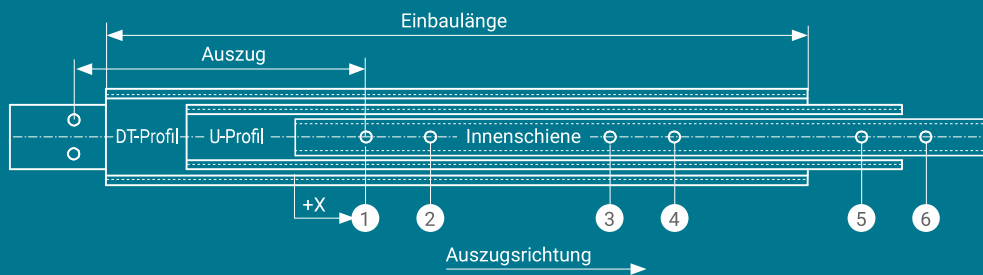


BOHRPOSITIONEN

in X, Innenschiene

Bohrung	Bohrposition	Einbaulänge
1	100 mm	immer
2	300 mm	immer
3		Ab Einbaulänge > 1000 mm
4		Ab Einbaulänge > 1000 mm
5	Einbaulänge - 300 mm	immer
6	Einbaulänge - 100 mm	immer

ABMESSUNGEN

Max. Last/Pair N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
5000	14,4	750	500	SWSU100-51-500
5200	15,9	825	550	SWSU100-51-550
5400	17,3	900	600	SWSU100-51-600
5500	18,8	975	650	SWSU100-51-650
5600	20,2	1050	700	SWSU100-51-700
5600	21,7	1125	750	SWSU100-51-750
5400	23,1	1200	800	SWSU100-51-800
5200	24,5	1275	850	SWSU100-51-850
4800	26,0	1350	900	SWSU100-51-900
4600	27,4	1425	950	SWSU100-51-950
4400	28,8	1500	1000	SWSU100-51-1000
4250	30,2	1575	1050	SWSU100-51-1050
4100	31,7	1650	1100	SWSU100-51-1100
4000	33,1	1725	1150	SWSU100-51-1150
3800	34,6	1800	1200	SWSU100-51-1200
3500	37,5	1950	1300	SWSU100-51-1300
3200	40,3	2100	1400	SWSU100-51-1400
3000	43,2	2250	1500	SWSU100-51-1500
2700	45,0	2400	1600	SWSU100-51-1600
2400	48,9	2550	1700	SWSU100-51-1700
2100	51,8	2700	1800	SWSU100-51-1800
1800	54,7	2850	1900	SWSU100-51-1900
1500	57,5	3000	2000	SWSU100-51-2000
1400	60,5	3150	2100	SWSU100-51-2100
1300	63,4	3300	2200	SWSU100-51-2200
1200	66,2	3450	2300	SWSU100-51-2300
1100	69,1	3600	2400	SWSU100-51-2400
1000	72,0	3750	2500	SWSU100-51-2500

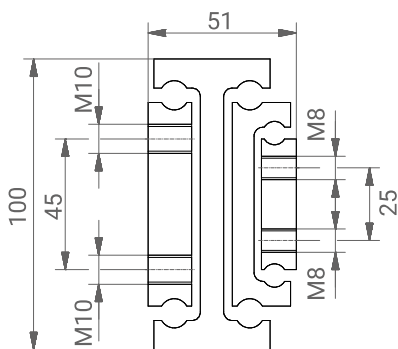

Nicht spezifizierte Abmessungen auf Anfrage

WERKSTOFF

ST NX2 NX4 A

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

VG LL KK NC4 VR LS

FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder E-Mail service@sws-technik.de