



# SWSU150-64

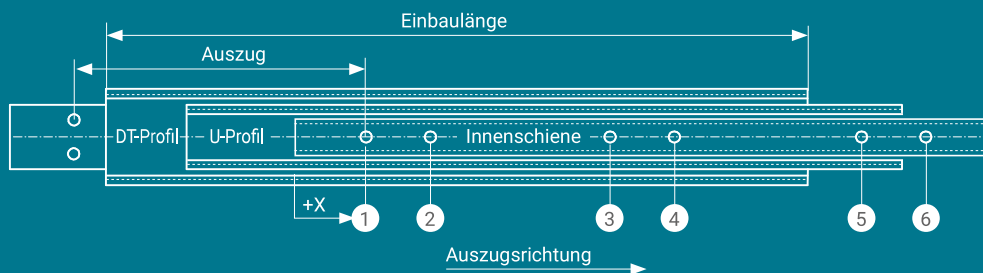

## BOHRPOSITIONEN

in X, Innenschielen

Bohrung	Bohrposition	Einbaulänge
1	100 mm	immer
2	300 mm	immer
3		Ab Einbaulänge > 1000 mm
4		Ab Einbaulänge > 1000 mm
5	Einbaulänge - 300 mm	immer
6	Einbaulänge - 100 mm	immer

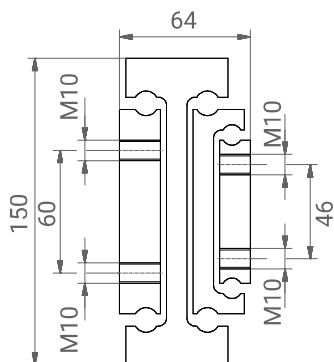

## ABMESSUNGEN

Max. Last/Pair N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
6250	27,2	750	500	SWSU150-64-500
6600	29,9	825	550	SWSU150-64-550
6800	32,6	900	600	SWSU150-64-600
7000	35,3	975	650	SWSU150-64-650
7100	38,1	1050	700	SWSU150-64-700
7200	40,8	1125	750	SWSU150-64-750
7600	43,5	1200	800	SWSU150-64-800
7500	46,2	1275	850	SWSU150-64-850
7350	48,9	1350	900	SWSU150-64-900
7200	51,6	1425	950	SWSU150-64-950
7000	54,3	1500	1000	SWSU150-64-1000
6800	57,0	1575	1050	SWSU150-64-1050
6600	59,7	1650	1100	SWSU150-64-1100
6400	62,4	1725	1150	SWSU150-64-1150
6200	65,2	1800	1200	SWSU150-64-1200
5800	70,5	1950	1300	SWSU150-64-1300
5300	75,9	2100	1400	SWSU150-64-1400
4800	81,3	2250	1500	SWSU150-64-1500
4300	86,8	2400	1600	SWSU150-64-1600
3800	92,2	2550	1700	SWSU150-64-1700
3300	97,6	2700	1800	SWSU150-64-1800
2800	103,0	2850	1900	SWSU150-64-1900
2400	108,5	3000	2000	SWSU150-64-2000
2300	114,0	3150	2100	SWSU150-64-2100
2200	119,5	3300	2200	SWSU150-64-2200
2100	124,9	3450	2300	SWSU150-64-2300
2000	130,3	3600	2400	SWSU150-64-2400
1900	135,8	3750	2500	SWSU150-64-2500
1800	141,2	3900	2600	SWSU150-64-2600
1700	146,6	4050	2700	SWSU150-64-2700
1600	152,0	4200	2800	SWSU150-64-2800
1500	157,5	4350	2900	SWSU150-64-2900
1400	162,9	4500	3000	SWSU150-64-3000

## WERKSTOFF

ST NX2 NX4 A

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

LL KK NC4 VR LS

## FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder E-Mail [service@sws-technik.de](mailto:service@sws-technik.de)