



# SWSU60-40

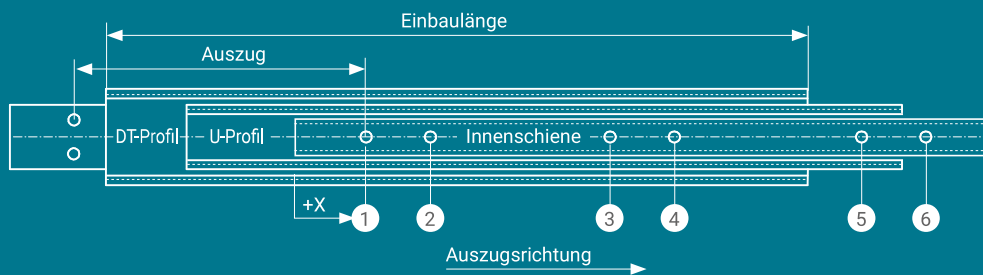

## BOHRPOSITIONEN

in X, Innenschienen

Bohrung	Bohrposition	Einbaulänge
1	50 mm	immer
2	100 mm	immer
3		Ab Einbaulänge > 500 mm
4		Ab Einbaulänge > 500 mm
5	Einbaulänge - 100 mm	immer
6	Einbaulänge - 50 mm	immer

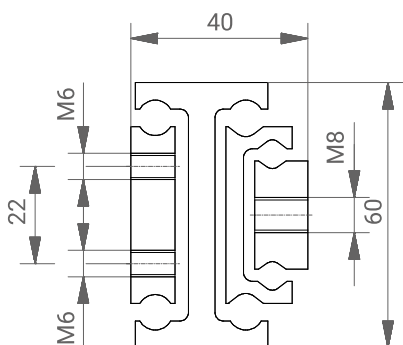

## ABMESSUNGEN

Max. Last/Pair N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
2500	4,1	450	300	SWSU60-40-300
2600	4,7	525	350	SWSU60-40-350
2650	5,3	600	400	SWSU60-40-400
2700	6,0	675	450	SWSU60-40-450
2700	6,6	750	500	SWSU60-40-500
1650	7,3	825	550	SWSU60-40-550
2600	7,9	900	600	SWSU60-40-600
2550	8,6	975	650	SWSU60-40-650
2500	9,2	1050	700	SWSU60-40-700
2450	9,9	1125	750	SWSU60-40-750
2400	10,5	1200	800	SWSU60-40-800
2350	11,1	1275	850	SWSU60-40-850
2300	11,8	1350	900	SWSU60-40-900
2250	12,4	1425	950	SWSU60-40-950
2200	13,1	1500	1000	SWSU60-40-1000
2150	13,7	1575	1050	SWSU60-40-1050
2100	14,3	1650	1100	SWSU60-40-1100
1975	15,0	1725	1150	SWSU60-40-1150
1950	15,6	1800	1200	SWSU60-40-1200
1800	16,9	1950	1300	SWSU60-40-1300
1650	18,2	2100	1400	SWSU60-40-1400
1500	19,5	2250	1500	SWSU60-40-1500
1400	20,8	2400	1600	SWSU60-40-1600
1300	22,1	2550	1700	SWSU60-40-1700
1200	23,4	2700	1800	SWSU60-40-1800
1100	24,7	2850	1900	SWSU60-40-1900
1000	26,0	3000	2000	SWSU60-40-2000

Nicht spezifizierte Abmessungen auf Anfrage

## WERKSTOFF

ST NX2 NX4 A

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

VG EHG EHO LL EOG EDG KK NC4  
VR LS

## FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder E-Mail [service@sws-technik.de](mailto:service@sws-technik.de)