



# SWSU80-43

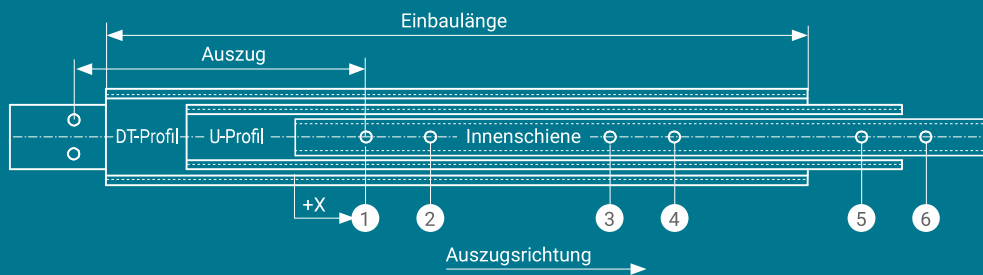

## BOHRPOSITIONEN

in X, Innenschiene

Bohrung	Bohrposition	Einbaulänge
1	100 mm	immer
2	200 mm	immer
3		Ab Einbaulänge > 1000 mm
4		Ab Einbaulänge > 1000 mm
5	Einbaulänge - 200 mm	immer
6	Einbaulänge - 100 mm	immer

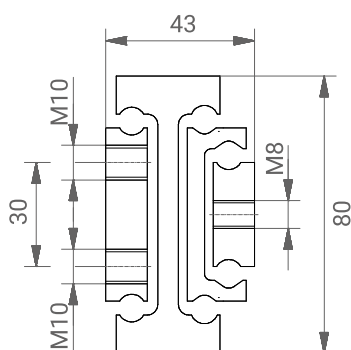

## ABMESSUNGEN

Max. Last/Pair N	Eigen-gewicht kg	Auszugs-länge mm	Einbau-länge mm	Bestellnummer
2900	7,6	600	400	SWSU80-43-400
3000	8,5	675	450	SWSU80-43-450
3200	9,5	750	500	SWSU80-43-500
3250	10,4	825	550	SWSU80-43-550
3300	11,4	900	600	SWSU80-43-600
3250	12,3	975	650	SWSU80-43-650
3200	13,3	1050	700	SWSU80-43-700
3100	14,2	1125	750	SWSU80-43-750
3000	15,1	1200	800	SWSU80-43-800
2900	15,9	1275	850	SWSU80-43-850
2800	17,0	1350	900	SWSU80-43-900
2700	17,9	1425	950	SWSU80-43-950
2600	18,8	1500	1000	SWSU80-43-1000
2500	19,7	1575	1050	SWSU80-43-1050
2380	20,7	1650	1100	SWSU80-43-1100
2250	21,6	1725	1150	SWSU80-43-1150
2160	22,5	1800	1200	SWSU80-43-1200
1940	24,4	1950	1300	SWSU80-43-1300
1720	26,2	2100	1400	SWSU80-43-1400
1500	28,1	2250	1500	SWSU80-43-1500
1400	30,1	2400	1600	SWSU80-43-1600
1350	32,0	2550	1700	SWSU80-43-1700
1300	33,8	2700	1800	SWSU80-43-1800
1200	35,7	2850	1900	SWSU80-43-1900
1100	37,6	3000	2000	SWSU80-43-2000
1050	39,5	3150	2100	SWSU80-43-2100
1000	41,4	3300	2200	SWSU80-43-2200
900	43,2	3450	2300	SWSU80-43-2300
800	45,1	3600	2400	SWSU80-43-2400
750	47,0	3750	2500	SWSU80-43-2500

## WERKSTOFF

ST NX2 NX4 A

OPTIONEN Legende/Abkürzungsverzeichnis S. 5

VG EHG EHO LL EDG KK NC4 VR LS

## FRAGEN / KONTAKT

Telefon +49 (0)6471 3199070 oder E-Mail [service@sws-technik.de](mailto:service@sws-technik.de)